


Inner DC Block 2.92mm Male to Female, 10MHz-40GHz, 60V, RB0140

Dimensions(mm) Tolerance±1%

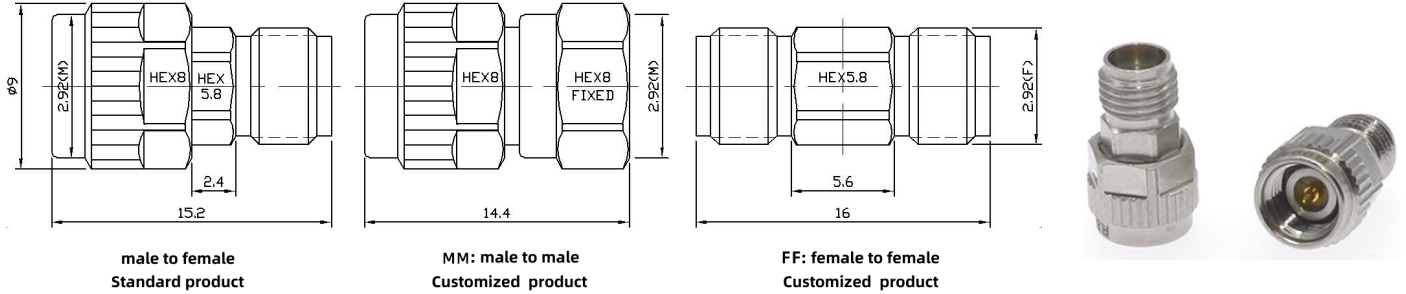

Electrical & Environmental

Frequency Range	10MHz-40GHz	Impedance	50 ohm
VSWR Max	1.35 max	Insertion Loss	0.5 dB max
Voltage Rating	60 Volts max	Operating Temp	-55°C~100°C
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)		

Mechanical

Connector	2.92mm Male to Female	Center Contact	1.27um Gold plated beryllium copper
Connector Body	Passivated stainless steel	RoHS	Compliant
Net Weight	About 3.5g		

Typical Test Data

